





1 (C18)
Black on Orange
30" X 30"
5" Lettering (C Series)



2 (C14)
Black on Orange
42" X 18"
5" Lettering (C Series)



3 (C7)
Black on Orange
30" X 18"
5" Lettering (C Series)



4 (C27)
Black on Orange
24" X 24"
(or 36" X 36" Optional)
4" Lettering (D Series)




5 (C16)
Black on Orange
48" X 48"
7" Lettering (C Series)



6 (C9A)
Black on Orange
48" X 48"



7 (C1)
Black on Orange
48" X 48"
5" Lettering (D Series)



8 (TYPE N MARKER)
Orange
18" X 18"




9 (C5)
Black on Orange on Black
48" X 18"
6" Lettering (D Series)
Left & Right




10 (C2)
Black on White
48" X 30"
5" Lettering (D Series)




11 (TYPE N MARKER)
3-3-1/4" Yellow Reflectors on 15" x 6" White Plate



(C18) (C18)
12
White on Red and Black on Orange on Black
24" x 24"-S Series C Letters
15" x 15"-S Series C Letters
Non-ReflectORIZED



13 (W3)
Black on Orange
36" X 36"
Left & Right



14 (W1)
Black on Orange
36" X 36"
Left & Right



15 (C22B)
Black on Orange
30" X 30"

NOTES:


- Since it is not possible to prescribe detailed standards of application for all situations which may arise, typical standards are presented here for the most common situations. These are desirable standards for normal open street situations, and additional protection should be provided for complicated situations, particularly on high speed or high volume streets. This sheet shall be used in conjunction with the "Manual of Traffic Controls for Construction and Maintenance Work Zones" issued by the State of California, Business, Transportation and Housing Agency, Department of Transportation, latest edition, which shall prevail.
- Delimiters shall be placed at 50 foot intervals along lane transitional areas and at 80 foot intervals along construction areas.
- Distance between signs and/or work area may be varied depending on terrain and traffic speed.
- All warning signs or delimiters used shall be reflectORIZED or illuminated.
- During the hours when no work is in progress, Men Working signs (No. 15) and Flagman Ahead signs (No. 8) shall be covered or removed.
- On Portable Flasher Support, the entire area of orange and white shall be reflectORIZED. ReflectORIZATION shall conform to specifications listed in Section 5-04 "Barrioles", of the manual listed in Note 1. The predominant color of the barrioles components shall be white.

LEGEND


- Sign (Smooth side faces traffic)
- Delimiter
- | Portable Flasher Support
- Direction of traffic



16 (C36)
Black on Orange
48" X 48"




CONE DELINEATOR

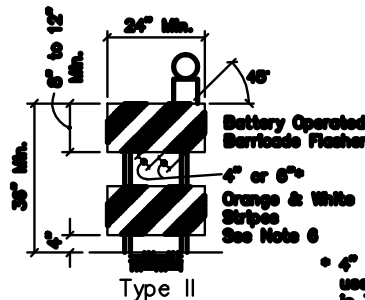

PORTABLE FLASHER SUPPORT BARRIOLE

* 4" Stripes may be used if length of roll is 3 feet or less.



HIGH FLAG STANDARD FOR WORKING SIGNS



TRAFFIC CONTROL SYSTEM FOR CONSTRUCTION ZONES DETAILS

MENDOT
STD. NO.
T21